Product datasheet

Specifications



APC Dry Contact I/O Accessory

AP9810



Overview

Presentation	UPS management accessory that provides two dry contact input and one relay output interface to APC UPS management offers with UIO ports such as the UPS Network Management Card (AP9641, AP9643) or Dry Contact I/O SmartSlot Card (AP9613).
Lead Time	Usually in Stock

Main

Provided Equipment	Cat 5 Ethernet cable
	User manual

Physical

•	
Colour	Black
Height	2.2 cm
Width	4.52 cm
Depth	4.46 cm
Net Weight	0.05 kg
Mounting Preference	No preference
Mounting Mode	Not rack-mountable

Conformance

Standards	EN 61000-4-2	
	EN 61000-4-3	
	EN 61000-4-4	
	EN 61000-4-6	

Environmental

Ambient Air Temperature For Operation	040 °C
Operating Altitude	03333 ft
Relative Humidity	095 %
Ambient Air Temperature For Storage	-1565 °C
Storage Altitude	0.004572.00 m
Storage Relative Humidity	095 %

Packing Units

Unit Type Of Package 1

Number Of Units In Package 1



PCE

1

Package 1 Height	3.300 cm
Package 1 Width	25.400 cm
Package 1 Length	12.700 cm
Package 1 Weight	140.000 g
Unit Type Of Package 2	РАМ
Number Of Units In Package 2	576
Package 2 Height	123.000 cm
Package 2 Width	120.000 cm
Package 2 Length	100.000 cm
Package 2 Weight	80.960 kg

Contractual warranty


Warranty

2 years repair or replace



Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

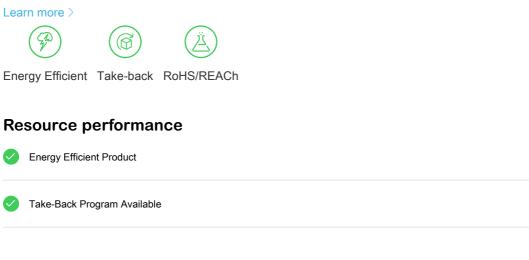

Well-being performance

Lead Free

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant EU RoHS Declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins



